

# ASP

## Aerial Splicing Pickup

INSULATED OR  
NON-INSULATED



Working Height  
34' 10" (10.60m)\*

Horizontal Reach  
19' 6" (5.90m)\*

Basket Capacity  
350 lbs (159kg)

\*Dimensions vary according to model number and options

### START SPLICING FASTER ON THE JOB!

- + All-in-One Solution
- + Compact Footprint
- + Maneuverable in Tight Spaces
- + Quick Set-Up Time
- + Security on the Job
- + Clutch Pump or Battery Driven Aerial
- + Heavy-Duty Design
- + Honda EU7000is
- + Transferrable Equipment Package



Sales: 1-888-765-3322 | Office: 254-857-8204 | Fax: 255-857-9253  
901 Enterprise Blvd, Hewitt, TX 76643 [UTEMbuckets.com](http://UTEMbuckets.com)



# ASP

## Aerial Splicing Pickup

### PICKUP REQUIREMENTS

Make/Model	Ford / F350
Pickup GVWR*	14,000 lbs
Front Axle GAWR*	4,100 lbs
Rear Axle GAWR*	9,500 lbs
Bed Length	8 ft.
	Dual Rear Wheels

\*Based on minimum specifications

### STANDARD AERIAL SPECS

Horizontal Side Reach	19' 6" (5.94m)
Height to Bottom of Basket	29' 10" (9.09m)
Working Height	34' 10" (10.61m)
Stowed Height	12' 2" (3.71m)
Standard Basket Capacity	350 lbs (158.76 kg)

\*Based on 35" frame height


### Options

- + Insulated Aerial
- + Fiberglass or Metal Baskets
- + Tow Package
- + Additional Strobes, Lighting, Light Bars, etc.
- + Generator Options Available
- + Directional Light Bars

### Lab Features

- + 6' 2" interior body height
- + Full Mobile Lab with heat & A/C
- + 2 splicing doors and tables w/ Cross Table
- + Custom Storage (drawers and cabinets)
- + Both AC and DC Lighting

Aerials meet and exceed ANSI A92.2-2021 and OSHA Requirements

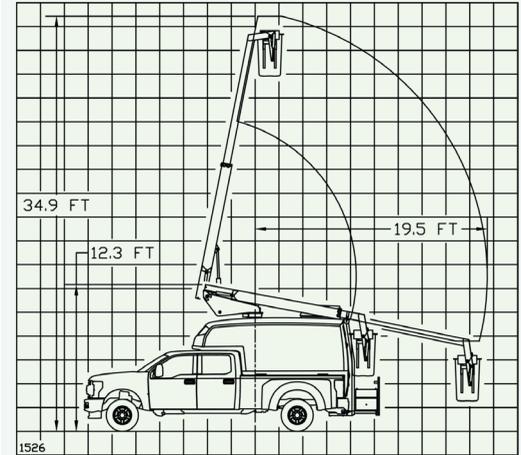

- + 540 Degree Rotation
- + Engine Driven Hydraulic Pump
- + 12 VDC Emergency Lowering
- + Proportional Upper Controls
- + Side Mounted Walk-Through Basket w/ Door
- + Light Weight Aluminum Inner Boom
- + Hydraulic Leveling Basket
- + Electric Tool Outlet at Basket (UTLN)



Sales: 1-888-765-3322 | Office: 254-857-8204 | Fax: 255-857-9253  
 901 Enterprise Blvd, Hewitt, TX 76643 [UTEMbuckets.com](http://UTEMbuckets.com)

