

AST trailer

UTLI41

INSULATED

UTLN41

NON-INSULATED

AERIAL SPLICING TRAILER



Working Height **43 ft 4 in (13.20m)***

Horizontal Reach **25 ft 4 in (7.77m)***

Basket Capacity **350 lbs (159kg)**

* dimensions vary according to model number and options



Completely Integrated Aerial & Splicing Lab solution.

Pulled by your pickup.

Powered by HONDA EU 7000is inverter style generator.

SPACIOUS 8 ft X 10 ft SPLICING LAB
6 ft X 6 in INTERIOR HEIGHT

HONDA
GENERATORS



1-888-765-3322



Utility Truck Equipment Co, L.L.C.

901 Enterprise Blvd

Hewitt, Texas 76643

Phone: 254-857-8204 Fax: 254-857-9253

www.UTECequip.com

AST trailer

UTLI41 INSULATED

UTLN41 NON-INSULATED

AERIAL SPLICING TRAILER

SPECIFICATIONS

GVWR	10,800 lbs
Trailer Weight	8,500 lbs *
Trailer Payload	2,300 lbs
Trailer Length	21.4 ft
Tongue Weight	1,500 lbs *


* approximate weight

SPLICING LAB

Interior Body Height	6 ft 6 in (1.98 m)
Cargo Space of 483 cu/ft of Usable Space	
Full-Service Mobile Workshop w/Walk-In Height	
Insulation in Walls & Ceiling	
AC & Heat	
Full Length Splicing Table	
Splicing Doors (Qty 2)	
Full Height Drawer Set	
Cabinet Storage	
DOT Lighting	
Amber Strobes	
Exterior Work Lights	
Solar Maintainer for 12v Deep Cycle Battery	

AERIAL SPECIFICATIONS

Horizontal Side Reach	25 ft 6 in (7.77 m)
Height Bottom Basket*	38 ft 4 in (11.4 m)
Working Height*	43 ft 4 in (13.20 m)
Stowed Height*	12 ft 6 in (3.81 m)
Standard Basket Capacity	350 lbs (159 kg)
540 Degree Rotation	
24 VDC Powered Aerial - std.	
Electric Tool Outlet at Basket	
Emergency Lower 12 VDC	
Proportional Upper Controls w/ Single Handle Actuator	
Side Mounted Walk-Thru Basket w/ Door	
Lightweight Aluminum Inner Boom	
Hydraulic Leveling Basket	
Pedestal Riser Houses Hydraulic Reservoir and Batteries	

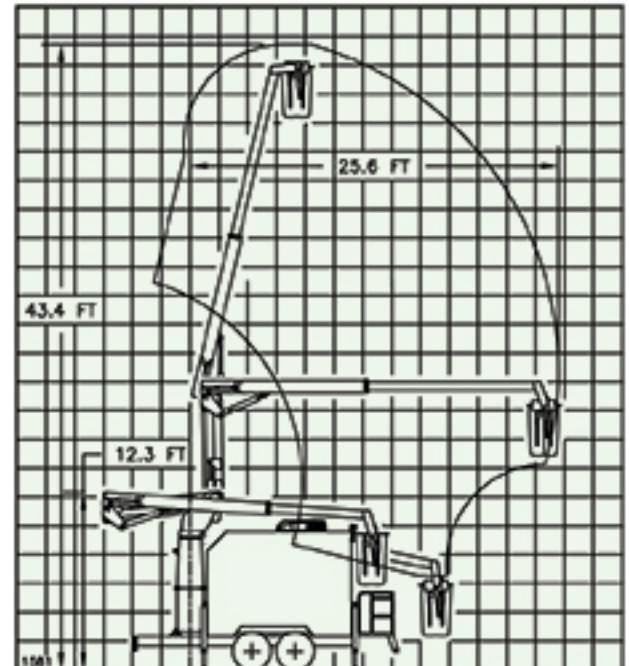

NTEA
and adhere to the ANSI A92.2-2021 and OSHA Requirements

UTLN35A meets and exceeds ANSI A92.2-2021 and OSHA Requirements

*Based on a 35in frame height

1-888-765-3322



Utility Truck Equipment C6 L.L.C.
901 Enterprise Blvd
Hewitt, Texas 76643
Phone: 254-857-8204 Fax: 254-857-9253
www.UTECequip.com

THIS DOCUMENT

