

ASC

INSULATED OR
NON-INSULATED

Aerial Splicing Chassis



Working Height
up to 43' 9" (13.3m)*

Horizontal Reach
25' 7" (7.8m)*

Basket Capacity
350 lbs (159kg)

*Dimensions vary according to model number and options

START SPLICING FASTER ON THE JOB!

- + All-in-One Solution
- + Compact Footprint
- + Maneuverable in Tight Spaces
- + Quick Set-Up Time
- + Security on the Job
- + Clutch Pump or Battery Driven Aerial
- + Heavy-Duty Design
- + Honda EU7000is



SPACIOUS 8' X 10' SPLICING LAB
6' 6" INTERIOR HEIGHT

Sales: 1-888-765-3322 | Office: 254-857-8204 | Fax: 255-857-9253
901 Enterprise Blvd, Hewitt, TX 76643 UTEMbuckets.com



ASC

Aerial Splicing Chassis

CHASSIS REQUIREMENTS

| | |
|----------------------------|---------------|
| Pickup GVWR | 19,500 lbs |
| Front Axle GAWR | 7,000 lbs |
| Rear Axle GAWR | 14,500 lbs |
| Approx Weight of Stability | 15,520 lbs |
| Cab to Axle Length | 84" or longer |

*Based on minimum specifications

STANDARD AERIAL SPECS

| | |
|----------------------------|---------------------|
| Horizontal Side Reach | 25' 7" (7.80m) |
| Height to Bottom of Basket | 38' 9" (11.81m) |
| Working Height | 43' 9" (13.34m) |
| Stowed Height | 12' 9" (3.87m) |
| Standard Basket Capacity | 350 lbs (158.76 kg) |


*Based on 35" frame height

Lab Features

- + 6' 6" Interior Body Height
- + Full Mobile Lab w/ heat & A/C
- + 2 splicing doors and tables w/ Cross Table
- + Full-size toolbox w/ locking drawers (standard)
- + Both AC and DC Lighting
- + FULLY Customizable

Options

- + Insulated Aerial
- + Fiberglass or Metal Baskets
- + Custom Cabinets, Drawers, and Storage
- + Additional Strobes, Lighting, Light Bars, etc.
- + Generator Options Available
- + 35ft telescopic aerial

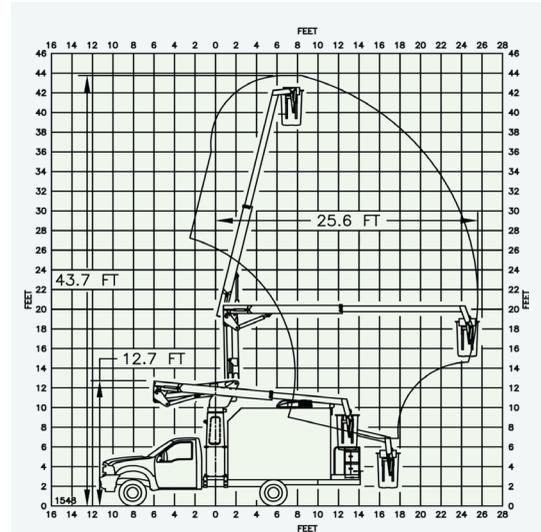

- + 540 Degree Rotation
- + Engine Driven Hydraulic Pump
- + 12 VDC Emergency Lowering
- + Proportional Upper Controls
- + Side Mounted Walk-Through Basket w/ Door
- + Light Weight Aluminum or Fiberglass Inner Boom
- + Hydraulic Leveling Basket
- + Electric Tool Outlet at Basket (UTLN)
- + Self-Contained Reservoir

Aerials meet and exceed ANSI A92.2-2015 and OSHA Requirements



Sales: 1-888-765-3322 | Office: 254-857-8204 | Fax: 255-857-9253
 901 Enterprise Blvd, Hewitt, TX 76643 UTEMbuckets.com

